

TY SUB-MODULES

TY sub-modules

In combination with the [TY\(3\)-18xx-POWER-4](#), [TY\(3\)-1810-HV-8](#) and [TY3-1810x-SUB-8](#) boards, the inter-changeable TY sub-modules can be used to create individual input configurations.



TY sub-modules overview

The following sections provide an overview and detailed information on the TY sub-modules. The values given below were determined in a standardized test setting¹⁾.

Type	Range	Bandwidth	Isolated
TY-SUB-600V	600 V _{RMS} (±1500 V _{PEAK})	300 kHz	Yes
TY-SUB-5V	5 V _{RMS} (±10 V _{PEAK})	300 kHz	Yes
TY-SUB-XV	600 V _{RMS} (±1000 V) ²⁾ 60 V _{RMS} (±100 V) 6 V _{RMS} (±10 V) 0.6 V _{RMS} (±1 V)	300 kHz	Yes
TY-POWER-SUB-CUR-20A-1B	20 A _{RMS} (±40 A _{PEAK})	300 kHz	Yes
TY-POWER-SUB-CUR-2A-1B	2 A _{RMS} (±4 A _{PEAK})	300 kHz	Yes
TY-POWER-SUB-CUR-1A-1B	1 A _{RMS} (±2 A _{PEAK})	300 kHz	Yes
TY-POWER-SUB-CUR-0.2A-1B	0.2 A _{RMS} (±0.4 A _{PEAK})	300 kHz	Yes
TY-POWER-SUB-dLV-5V	5 V _{RMS} (±10 V _{PEAK})	5 MHz	No
TY-POWER-SUB-dLV-1V	1 V _{RMS} (±2 V _{PEAK})	5 MHz	No
TY-POWER-SUB-CT	1 A _{RMS} (±2 A _{PEAK}) 0.5 A _{RMS} (±1 A _{PEAK}) 0.25 A _{RMS} (±0.5 A _{PEAK}) 0.1 A _{RMS} (±0.2 A _{PEAK})	5 MHz	No
TY-POWER-SUB-dLV-1³⁾	5 V _{RMS} (±10 V _{PEAK})	100 kHz	No

Tab. 81: TY sub-modules overview

- The following accuracy conditions were applied: Temperature: 23 ± 5 °C; humidity: 40 to 60 % rel. humidity; input waveform: sine wave; common mode voltage: 0 V; line filter: Auto; sample rate: 1 MS/s; resolution: 24 bit; power factor: 1; after warm-up; after zero level, accuracy: Frequency (f) in [kHz] (12-month accuracy ± reading error and range error)
- Max. allowed input: 600 V CAT II (850 V_{PEAK}).
- Not supported by TY3-18xx-SUB-8 module.





TY-SUB-600V

TY-SUB-600V				
Input range	600 V _{RMS} (±1500 V _{PEAK}) CF=2.5			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C)	DC	±0.02 % of reading ±0.005 % of range		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 100 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	100 kHz to 200 kHz	±(0.04 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm / °C			
Offset drift	1 mV / °C			
Typical THD	-105 dB			
Typical CMRR	>100 dB @ 50 Hz; >90 dB @ 1 kHz; >70 dB @ 10 kHz; >50 dB @ 100 kHz			
Bandwidth (-3 dB)	300 kHz			
Rated input voltage to earth according to EN 61010-2-30	300 V CAT III / 600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min); 35 kV/μs transient immunity			
Common mode voltage	600 V _{RMS}			
Overvoltage protection	1500 V _{PEAK} or 1000 V _{RMS} (1 min)			
Input impedance	5 MΩ; 3.5 pF			
Isolation (earth) resistance	100 GΩ; 4 pF (IN- to GND)			
Connector	Safety banana sockets			
Sample rate	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[mV]
0.1 kS/s	125	140	20.4	2.0
1 kS/s	120	140	19.6	3.2
10 kS/s	111	140	18.2	5.4
100 kS/s	104	140	16.9	35.0
1000 kS/s	93	128	15.1	150.0
2000 kS/s	93	126	15.1	151.0

Tab. 82: TY-SUB-600V

1) SFDR excluding harmonics

2) ENOB calculated from SNR

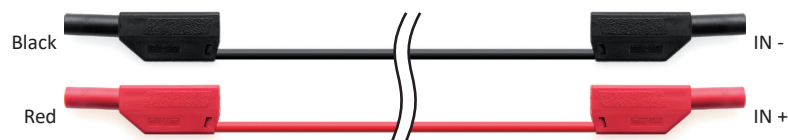

WARNING



Risk of injury due to electric shock

Voltage measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.




TY-SUB-5V

TY-SUB-5V				
Input range	5 V _{RMS} (±10 V _{PEAK}) CF=2			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C)	DC	±0.02 % of reading ±0.005 % of range		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 100 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	100 kHz to 200 kHz	±(0.04 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm / °C			
Offset drift	1 μV / °C			
Typical THD	-102 dB			
Typical CMRR	>140 dB @ 50 Hz; >106 dB @ 10 kHz; >102 dB @ 100 kHz			
Bandwidth (-3 dB)	300 kHz			
Rated input voltage to earth according to EN 61010-2-30	300 V CAT III / 600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min); 35 kV/μs transient immunity			
Common mode voltage	600 V _{RMS}			
Overvoltage protection	1000 V _{PEAK} or 600 V _{RMS} (1 min)			
Input impedance	5 MΩ; 22 pF			
Isolation (earth) resistance	100 GΩ; 4 pF (IN- to GND)			
Connector	Safety banana sockets			
Sample rate	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[μV]
0.1 kS/s	134	145	22.0	5
1 kS/s	126	148	20.6	14
10 kS/s	118	145	19.4	44
100 kS/s	109	138	17.8	155
1000 kS/s	98	135	16.1	596
2000 kS/s	98	132	16.1	598

Tab. 83: TY-SUB-5V

1) SFDR excluding harmonics

2) ENOB calculated from SNR



WARNING



Risk of injury due to electric shock

Voltage measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.



TY-SUB-XV


TY-SUB-XV																
Input range		600 V _{RMS} (±1000 V) ¹⁾				60 V _{RMS} (±100 V)				6 V _{RMS} (±10 V)				0.6 V _{RMS} (±1 V)		
Resolution		16-bit														
1 year accuracy (23 °C ±5 °C)		DC (600 V, 60 V range)				±0.03 % of reading ±0.01 % of range										
		DC (6 V range)				±0.02 % of reading ±0.01 % of range										
		DC (0.6 V range)				±0.02 % of reading ±150 μV										
		0.5 Hz to 500 Hz				±0.03 % of reading										
		>500 Hz to 100 kHz				±(0.06 % * f) of reading f: frequency in kHz										
Gain drift		25 ppm / °C														
Offset drift		2 μV / °C														
Typical THD		-90 dB														
Typical CMRR		≤6 V range: >140 dB @ 50 Hz; >125 dB @ 1 kHz; >115 dB @ 10 kHz; >94 dB @ 100 kHz														
		>6 V range: >100 dB @ 50 Hz; >90 dB @ 1 kHz; >70 dB @ 10 kHz; >50 dB @ 100 kHz														
Bandwidth (-3 dB)		300 kHz														
Rated input voltage to earth acc. to EN 61010-2-30		300 V CAT III / 600 V CAT II														
Isolation voltage		3750 V _{RMS} (1 min); 35 kV/μs transient immunity														
Common mode voltage		600 V _{RMS}														
Overvoltage protection		1000 V _{PEAK} or 600 V _{RMS}														
Input impedance		10 MΩ; t.b.d. pF														
Isolation (earth) resistance		100 GΩ; 4 pF (IN- to GND)														
Connector		Safety banana sockets														
	0.6 V				6 V				60 V				600 V			
	SNR	SFDR ¹⁾	ENOB ²⁾	Noise	SNR	SFDR ¹⁾	ENOB ²⁾	Noise	SNR	SFDR ¹⁾	ENOB ²⁾	Noise	SNR	SFDR ¹⁾	ENOB ²⁾	Noise
Sample rate	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]
0.1 kS/s	111.0	t.b.d	18.1	0.0	120.1	t.b.d	19.7	0.0	120.1	t.b.d	19.7	0.0	100.1	t.b.d	16.3	3.5
1 kS/s	109.4	t.b.d	17.9	0.1	111.0	t.b.d	18.1	0.1	111.0	t.b.d	18.1	0.1	113.5	t.b.d	18.6	9.0
10 kS/s	101.4	t.b.d	16.6	0.1	84.3	t.b.d	13.7	0.4	84.3	t.b.d	13.7	0.4	104.9	t.b.d	17.1	34.0
100 kS/s	92.9	t.b.d	15.1	0.3	94.7	t.b.d	15.4	1.1	94.7	t.b.d	15.4	1.1	95.2	t.b.d	15.5	110.0
300 kS/s	87.7	122.0	14.3	0.5	89.4	122.0	14.6	2.4	89.4	122.0	14.6	2.4	89.9	122.0	14.6	220.0
1 MS/s	83.4	122.0	13.6	1.3	82.3	t.b.d	13.4	4.7	82.3	t.b.d	13.4	4.7	83.0	122.0	13.5	470.0

Tab. 84: TY-SUB-XV

1) Max. allowed input 600 V CAT II (850 V_{PEAK})

2) SFDR excluding harmonics

3) ENOB calculated from SNR



WARNING



Risk of injury due to electric shock

Voltage measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.






TY-POWER-SUB-CUR-20A-1B

TY-POWER-SUB-CUR-20A-1B				
Range	20 A _{RMS} (±40 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾²⁾	DC	±0.02 % of reading ±0.02 % of range ³⁾		
	0.5 Hz to 1 kHz	±0.03 % of reading		
	1 kHz to 5 kHz	±0.15 % of reading		
	5 kHz to 10 kHz	±0.35 % of reading		
	10 kHz to 50 kHz	±(0.3 % + 0.05 % * f) of reading	f: frequency in kHz	
	50 kHz to 300 kHz	±(0.10 % * f) of reading	f: frequency in kHz	
	Gain drift	20 ppm/°C		
Offset drift	0.35 mA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/μs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	50 A _{PEAK} or 40 A _{RMS} (1 s)			
Thermal current limit	20 A _{RMS}			
Input resistance	2 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits ⁴⁾				
	SNR	SFDR ⁵⁾	ENOB ⁶⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[mA]
0.1 kS/s	101	117	16.5	0.8
1 kS/s	100	119	16.3	1.4
10 kS/s	98	113	16.0	2.1
100 kS/s	93	110	15.2	3.9
1000 kS/s	85	110	13.8	10.3
2000 kS/s	84	107	13.7	10.9

Tab. 85: TY-POWER-SUB-CUR-20A-1B

- 1) For self-generated heat caused by current input, add $0.00015 \times I^2$ % of reading + $20 \times I^2$ μA to the current accuracy. 'I' is the current reading [A]. The influence from self-generated heat continues until the temperature of the shunt resistor inside the DEWE2-Chassis lowers even if the current input changes to a small value.
- 2) Below 1 % of range, add 10 ppm of range

- 3) Add 0.03 % of range with no zero level.
- 4) LP filter in auto mode
- 5) SFDR excluding harmonics
- 6) ENOB calculated from SNR



WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.

WARNING



Risk of injury due to heat or fire

Always use the dedicated measurement leads which come with your module, or appropriate measurement leads, which are rated for at least 20 A continuous current.



TY-POWER-SUB-CUR-2A-1B

TY-POWER-SUB-CUR-2A-1B				
Range	2 A _{RMS} (±4 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±0.02 % of range ²⁾		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 30 kHz	±0.1 % of reading		
	30 kHz to 200 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	200 kHz to 300 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm/°C			
Offset drift	15 µA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/µs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	10 A _{PEAK} or 5 A _{RMS} (1 s)			
Thermal current limit	3 A _{RMS}			
Input resistance	50 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits ³⁾				
Sample rate	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[µA]
0.1 kS/s	110	125	18.0	34.8
1 kS/s	107	126	17.5	47.2
10 kS/s	105	122	17.1	78.2
100 kS/s	100	120	16.3	172.6
1000 kS/s	91	114	14.8	541.2
2000 kS/s	90	114	14.7	553.1

Tab. 86: TY-POWER-SUB-CUR-2A-1B

- 1) Below 1 % of range, add 25 ppm of range
- 2) Add 0.03 % of range with no zero level.
- 3) LP filter in auto mode
- 4) SFDR excluding harmonics
- 5) ENOB calculated from SNR



Grey



Green



WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.




TY-POWER-SUB-CUR-1A-1B

TY-POWER-SUB-CUR-1A-1B				
Range	1 A _{RMS} (±2 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±80 µA ²⁾		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 30 kHz	±0.1 % of reading		
	30 kHz to 200 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	200 kHz to 300 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm/°C			
Offset drift	4 µA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/µs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	4 A _{PEAK} or 2 A _{RMS} (1 s)			
Thermal current limit	1 A _{RMS}			
Input resistance	500 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits ³⁾				
Sample rate	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[µA]
0.1 kS/s	131	149	21.5	1.4
1 kS/s	125	149	20.5	3.9
10 kS/s	116	144	19.0	12.6
100 kS/s	106	137	17.3	47.0
1000 kS/s	96	134	15.7	161.0
2000 kS/s	95	130	15.5	162.0

Tab. 87: TY-POWER-SUB-CUR-1A-1B

- 1) Below 1 % of range, add 25 ppm of range
- 2) Add 0.03 % of range with no zero level.
- 3) LP filter in auto mode
- 4) SFDR excluding harmonics
- 5) ENOB calculated from SNR

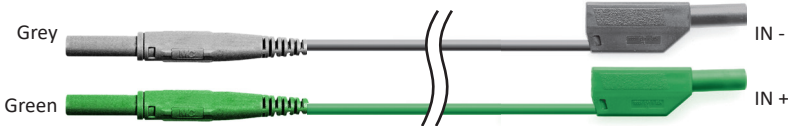

WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.




TY-POWER-SUB-CUR-02A-1B

TY-POWER-SUB-CUR-02A-1B				
Range	0.2 A _{RMS} (±0.4 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±0.02 % of range ²⁾		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 30 kHz	±0.1 % of reading		
	30 kHz to 200 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	200 kHz to 300 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm/°C			
Offset drift	4 µA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/µs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	2 A _{PEAK} or 1 A _{RMS} (1 s)			
Thermal current limit	0.5 A _{RMS}			
Input resistance	500 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits ³⁾				
Sample rate	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[µA]
0.1 kS/s	108	128	17.6	3.6
1 kS/s	107	123	17.5	5.6
10 kS/s	104	121	17.0	9.2
100 kS/s	99	114	16.2	17.3
1000 kS/s	91	114	14.8	51.3
2000 kS/s	90	114	14.7	54.9

Tab. 88: TY-POWER-SUB-CUR-02A-1B

- 1) Below 1 % of range, add 25 ppm of range
- 2) Add 0.03 % of range with no zero level.
- 3) LP filter in auto mode
- 4) SFDR excluding harmonics
- 5) ENOB calculated from SNR

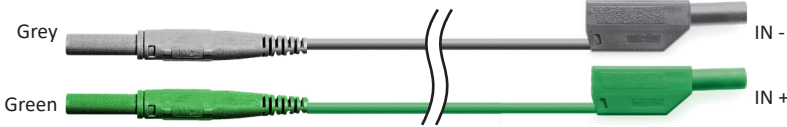

WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.





TY-POWER-SUB-dLV-1V

TY-POWER-SUB-dLV-1V				
Range	1 V _{RMS} (±2 V _{PEAK}) NOT ISOLATED ⚠			
Sampling rate / resolution	TY(3)-1810-HV		100 S/s to 1 MS/s	24-bit
	TY3-1810-SUB-8		100 S/s to 1 MS/s	24-bit
	TY(3)-1820-POWER		100 S/s to 2 MS/s	24-bit
	TY3-1810M-POWER		100 S/s to 2 MS/s	24-bit
			>2 MS/s to 10 MS/s	18-bit
1 year accuracy (23 °C ±5 °C)	DC	±0.015 % of reading ±200 µV		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 500 kHz	±(0.006 % * f) of reading		f: frequency in kHz
	500 kHz to 3000 kHz	±(0.006 % * f) of reading		f: frequency in kHz
Gain drift	10 ppm / °C			
Offset drift	10 µV / °C			
Typical THD	-100 dB			
Typical CMRR	>70 dB @ 50 Hz; >65 dB @ 10 kHz; >45 dB @ 100 kHz			
Bandwidth (-3 dB)	5 MHz			
Isolation voltage	None. Use with isolated current transducer.			
Common mode voltage	±10 V _{DC}			
Overvoltage protection	±300 V _{DC}			
Connector	D-SUB-9			
Input impedance	5 MΩ, differential 5 MΩ, 15 pF			
Sensor supply (±9 V)	Max. 40 mA			
Sample rate	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[µV]
0.1 kS/s	120	133	19.6	4.8
1 kS/s	117	130	19.2	6.3
10 kS/s	111	129	18.2	16.0
100 kS/s	104	129	17.1	49.0
1000 kS/s	95	129	15.5	162.0
2000 kS/s	92	129	15.0	243.0

Tab. 90: TY-POWER-SUB-dLV-1V

1) SFDR excluding harmonics

2) ENOB calculated from SNR



Pin 1:	TEDS	Pin 6:	n.c.
Pin 2:	IN+	Pin 7:	IN-
Pin 3:	n.c.	Pin 8:	n.c.
Pin 4:	GND (not isolated)	Pin 9:	-9 V (40 mA max.)
Pin 5:	+9 V (40 mA max.)		

WARNING



Risk of injury due to electric shock
TY-POWER-SUB-dLV-xV modules are not isolated.





TY-POWER-SUB-dLV-5V

TY-POWER-SUB-dLV-5V				
Range	5 V _{RMS} (±10 V _{PEAK}) NOT ISOLATED ⚠			
Sampling rate / resolution	TY(3)-1810-HV		100 S/s to 1 MS/s	24-bit
	TY3-1810-SUB-8		100 S/s to 1 MS/s	24-bit
	TY(3)-1820-POWER		100 S/s to 2 MS/s	24-bit
	TY3-1810M-POWER		100 S/s to 2 MS/s	24-bit
			>2 MS/s to 10 MS/s	18-bit
1 year accuracy (23 °C ±5 °C)	DC	±0.015 % of reading ±200 μV		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 500 kHz	±(0.006 % * f) of reading		f: frequency in kHz
	500 kHz to 3000 kHz	±(0.006 % * f) of reading		f: frequency in kHz
Gain drift	10 ppm / °C			
Offset drift	10 μV / °C			
Typical THD	-100 dB			
Typical CMRR	>70 dB @ 50 Hz; >65 dB @ 10 kHz; >45 dB @ 100 kHz			
Bandwidth (-3 dB)	5 MHz			
Isolation voltage	None. Use with isolated current transducer.			
Common mode voltage	±10 V _{DC}			
Overvoltage protection	±300 V _{DC}			
Connector	D-SUB-9			
Input impedance	5 MΩ, differential 5 MΩ, 15 pF			
Sensor supply (±9 V)	Max. 40 mA			
Sample rate	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[μV]
0.1 kS/s	125	138	20.5	13
1 kS/s	122	135	20.0	21
10 kS/s	116	134	19.0	54
100 kS/s	108	134	17.7	152
1000 kS/s	99	134	16.2	489
2000 kS/s	96	134	15.7	712

Tab. 89: TY-POWER-SUB-dLV-5V

1) SFDR excluding harmonics

2) ENOB calculated from SNR



Pin 1:	TEDS	Pin 6:	n.c.
Pin 2:	IN+	Pin 7:	IN-
Pin 3:	n.c.	Pin 8:	n.c.
Pin 4:	GND (not isolated)	Pin 9:	-9 V (40 mA max.)
Pin 5:	+9 V (40 mA max.)		

WARNING



Risk of injury due to electric shock

TY-POWER-SUB-dLV-xV modules are not isolated.





TY-POWER-SUB-dLV-1

TY-POWER-SUB-dLV-1				
Range	5 V _{RMS} (±10 V _{PEAK}) NOT ISOLATED ⚠			
Resolution	18-bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±0.02 % of range		
	0.5 Hz to 5 kHz	±0.03 % of reading		
	5 kHz to 30 kHz	±(0.01 % * f) of reading	f: frequency in kHz	
	30 kHz to 50 kHz	±(0.02 % * f) of reading	f: frequency in kHz	
	50 kHz to 100 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Typical THD	-100 dB			
Typical CMRR	>70 dB @ 50 Hz; >65 dB @ 10 kHz; >45 dB @ 100 kHz			
Isolation voltage	None. Use with isolated current transducer.			
Overvoltage protection	±30 V _{DC}			
Bandwidth	100 kHz			
Connector	D-SUB-9			
Input resistance	1 MΩ			
Sensor supply (±9 V)	Max. 40 mA			
Sample rate	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[μV]
0.1 kS/s	129	150	21.1	14.3
1 kS/s	119	142	19.5	45.3
10 kS/s	109	139	17.8	163.3
100 kS/s	99	131	16.2	590.1
1000 kS/s	94	124	15.3	1337.5
2000 kS/s	92	123	15.0	1375.7

Tab. 91: TY-POWER-SUB-dLV-1

1) Below 1 % of range, add 25 ppm of range

2) Add 0.03 % of range with no zero level.



Pin 1:	TEDS	Pin 6:	n.c.
Pin 2:	IN+	Pin 7:	IN-
Pin 3:	n.c.	Pin 8:	n.c.
Pin 4:	GND (not isolated)	Pin 9:	-9 V (40 mA max.)
Pin 5:	+9 V (40 mA max.)		

WARNING



Risk of injury due to electric shock
TY-POWER-SUB-dLV-1 modules are not isolated.





TY-POWER-SUB-CT

TY-POWER-SUB-CT																
Range NOT ISOLATED ⚠	$1 A_{RMS} (\pm 2 A_{PEAK})$															
	$0.5 A_{RMS} (\pm 1 A_{PEAK})$															
	$0.25 A_{RMS} (\pm 0.5 A_{PEAK})$															
	$0.1 A_{RMS} (\pm 0.2 A_{PEAK})$															
Sampling rate/resolution	TRION(3)-1810-HV								100 S/s to 1 MS/s				24-bit			
	TY3-1810-SUB-8								100 S/s to 1 MS/s				24-bit			
	TY(3)-1820-POWER								100 S/s to 2 MS/s				24-bit			
	TY3-1810M-POWER								100 S/s to 2 MS/s				24-bit			
>2 MS/s to 10 MS/s									18-bit							
1 year accuracy (23 °C ±5 °C) ¹⁾	DC								±0.02 % of reading ±0.02 % of range (±50 µA without zero)							
	0.5 Hz to 10 kHz								±0.03 % of reading							
	10 kHz to 500 kHz								±(0.006 % * f) of reading				f: frequency in kHz			
	500 kHz to 3000 kHz								±(0.006 % * f) of reading				f: frequency in kHz			
Gain drift	Typ. 10 ppm/°C; max: 20 ppm/°C															
Offset drift	Typ. 0.5 µA/°C; max: 2.5 µA/°C															
Typical THD	-95 dB															
Typical CMRR	>100 dB @ 50 Hz; 100 dB @1 kHz; 95 dB @ 10 kHz; 70 dB @ 100 kHz															
Bandwidth (-3 dB)	5 MHz															
Isolation voltage	None. Only use with isolated current sensors complying with the required safety category.															
Common mode voltage	±10 V															
Overcurrent protection	±1.3 A _{RMS} continuously; 4 A _{PEAK} or 2 A _{RMS} (1 s)															
Input resistance	500 mΩ															
Connector	D-SUB-9															
Mating cable	ADAP-DB9M-DB9F-POW															
Supported current transducer	PA-IT-xxx-S or PA-IN-xxx-S series															
Transducer supply	Requires clamp supply: DEWE3-PA8 series; DW2-CLAMP-DC-POWER-8 (Clamp Supply Box)															
Sensor supply (±9 V)	Max. 40 mA															
Typical signal to noise ratio, spurious free SNR, effective number of bits ²⁾																
	0.1 A				0.25 A				0.5 A				1 A			
	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise
Sample rate	[dB]	[dB]	[Bit]	[µA _{pp}]	[dB]	[dB]	[Bit]	[µA _{pp}]	[dB]	[dB]	[Bit]	[µA _{pp}]	[dB]	[dB]	[Bit]	[µA _{pp}]
0.1 kS/s	114	129	18.6	1.0	122	137	20.0	1.0	118	136	19.3	2	124	142	20.4	2.4
1 kS/s	107	132	17.5	2.7	115	140	18.8	2.7	114	139	18.6	6	120	145	19.6	6.4
10 kS/s	98	127	16.0	9.1	106	135	17.4	9.1	106	131	17.3	19	112	137	18.3	19
100 kS/s	89	119	14.5	33	97	127	15.8	33	96	127	15.7	68	102	133	16.7	68
1 MS/s	79	114	12.8	115	87	122	14.1	115	86	122	14.0	248	92	128	15.0	248
2 MS/s	76	111	12.3	166	83	119	13.6	382	83	119	13.5	824	82	125	14.5	824
5 MS/s	72	108	11.7	274	80	116	12.9	274	79	116	12.8	558	85	122	13.9	558
10 MS/s	69	105	11.2	382	77	113	12.5	382	76	112	12.3	824	82	118	13.4	824

Tab. 92: TY-POWER-SUB-CT

TY SUB-MODULES

- 1) Below 1 % of range, add 25 ppm of range
- 2) LP Filter in auto mode
- 3) SFDR excluding harmonics
- 4) ENOB calculated from SNR



Pin 1:	TEDS	Pin 6:	n.c.
Pin 2:	IN+	Pin 7:	IN-
Pin 3:	n.c.	Pin 8:	n.c.
Pin 4:	GND (not isolated)	Pin 9:	n.c.
Pin 5:	n.c.		

WARNING



Risk of injury due to electric shock
TY-POWER-SUB-CT modules are not isolated. Use with isolated current transducer only.

INFORMATION

The TY3-1810M-SUB-8 is mainly recommended for the use with TY-SUB-CT, TY-POWER-SUB-dLV-1V and TY-POWER-SUB-dLV-5V to benefit from the full bandwidth of these sub-modules.